

disposable showerfilter instructions for use

thank you for choosing VOL[®] advanced filtration technology


- for more information about VOL[®], please visit our website.
- for correct installation, use and maintenance, please read these instructions carefully and keep for future reference.
- if you have questions concerning the product, please feel free to contact our customer service team. you can visit our website to provide feedback. we will do our best to answer your question and offer more product information.
- if you need to replace the filter cartridges, use VOL[®] filter cartridges.

- ✓ good for hair and skin
- ✓ rapid filtration speed
- ✓ removes 98% of water soluble metals
- ✓ removes chlorine
- ✓ reduces sediment



the water source should be municipal water. please do not use groundwater for filtration to avoid reducing filtration effectiveness and shorten filter service life. tank water may require a sediment pre filter unit attached to tank. please contact us for more information.

contents

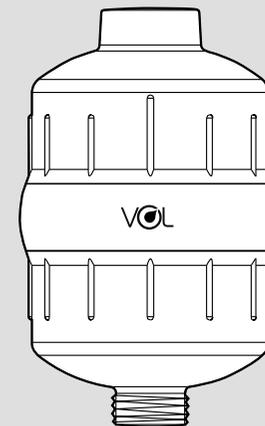

disposable filter


product technical specifications

flow rate	6L/min
max. pressure	60 psi
water source	municipal water
filter life	6 months*

installation


fixed shower head

- 1 unscrew existing shower head from shower arm.
- 2 screw filter (internal thread) onto shower arm.
- 3 screw shower head on filter (external thread).
- 4 turn blue ring to the installation date.
- 5 run shower for 3 minutes to clear carbon particles.




flexible shower hose - wall attachment

- 1 unscrew existing shower flexible hose from wall.
- 2 screw filter (internal thread) onto wall connection.
- 3 screw shower flexible hose onto filter (external thread).
- 4 turn blue ring to the installation date.
- 5 run shower for 3 minutes to clear carbon particles.

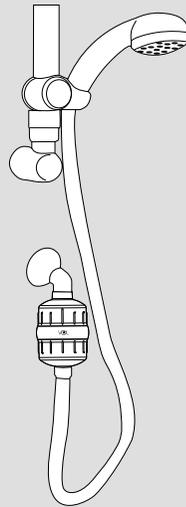

flexible shower hose - head attachment

- 1 unscrew existing shower head from flexible hose.
- 2 screw filter (internal thread) onto shower head.
- 3 screw shower flexible hose onto filter (external thread).
- 4 turn blue ring to the installation date.
- 5 run shower for 3 minutes to clear carbon particles.

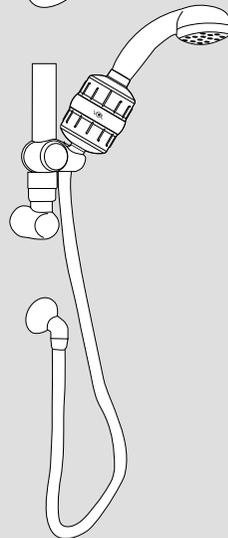

important notes

- to get the best effect from your disposable shower filter, please try to control the flow rate below 9.5L/min under the pressure of 60 psi. if necessary, please change your current shower head to a water saving one where the flow rate is below 9.5L/min.
- in the beginning, the filtered water may have small black carbon particles released from the filter. this is normal with no negative health effects. run the shower filter for 3 minutes to clear carbon particles. use this preliminary dark water for watering or cleaning.
- if the filtered water develops an odour, please replace the filter immediately.
- please store spare filters in a cool and dry place.
- ★ in order to maintain optimum filtration, it is recommended to replace the disposable filter after 6 months. because water quality and volume of usage varies, filter service life changes.

VOL[®]
clever water

kemflo australia Pty Ltd
17 hinkler court
brendale, qld 4500
australia

website:
www.volwater.com